

TUF-TITE®

Speed Levelers™ SL-4

One size fits all 4" PVC pipe. Model SL-3, for 3" PVC pipe, also available.


Model SL-4

Model SL-3

Notched gripper teeth for non-slip hand adjustments.

1-15/16" Flo-Hole. Allows free flow of effluent.


Inner Guide Ring. To set water elevation when aligning Levelers.

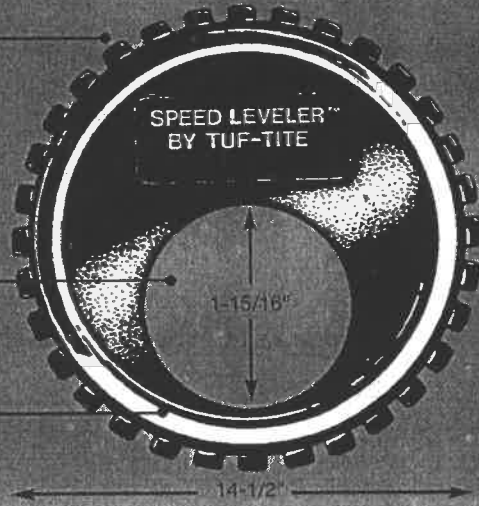

Reverse pliable wiper. Compresses for watertight fit in pipes.






Tough corrosion-resistant polyethylene throughout.

Rigid face plate. Makes hand adjustments easier.

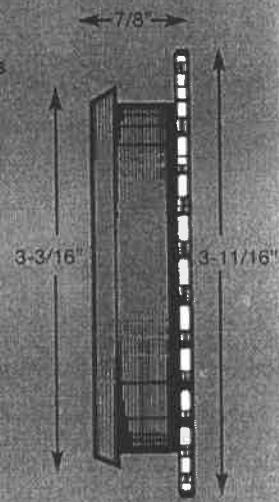

HOW TO SET SPEED LEVELERS


1. Insert a Speed Leveler into each outlet pipe inside the Distribution Box. Rotate each Leveler until the Flo-Hole is at the 12 o'clock position.
2. Start filling the Distribution Box with water. Stop when the water level touches the "Inner Guide Ring" of the highest Speed Leveler.
3. Rotate all the Speed Levelers until each of the Flo-Holes is aligned just above the water level. Slowly add more water to see if it enters all the Flo-Holes simultaneously. Make fine-tune adjustments if necessary.
4. You can alternate fields, or rest failed lines anytime. Simply rotate the Leveler on the appropriate pipe until the Flo-Hole is at the 12 o'clock position to stop the flow.

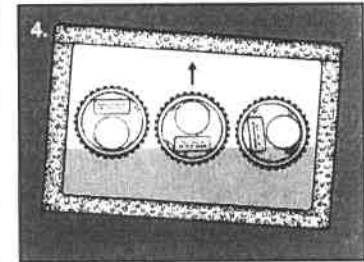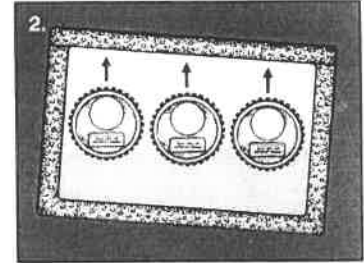

TUF-TITE®

Drainage and Septic Products

Tuf-Tite Corporation
1200 Flex Court
Lake Zurich, Illinois 60047

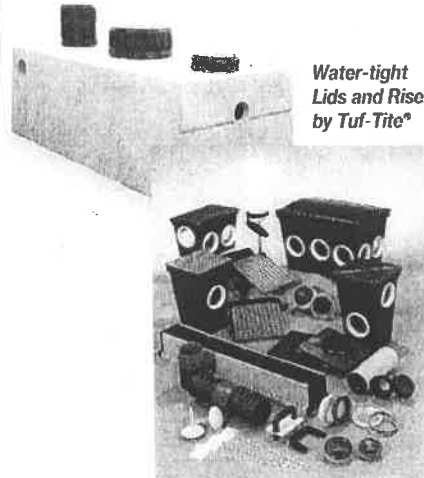

Water-tight Lids and Risers by Tuf-Tite®